
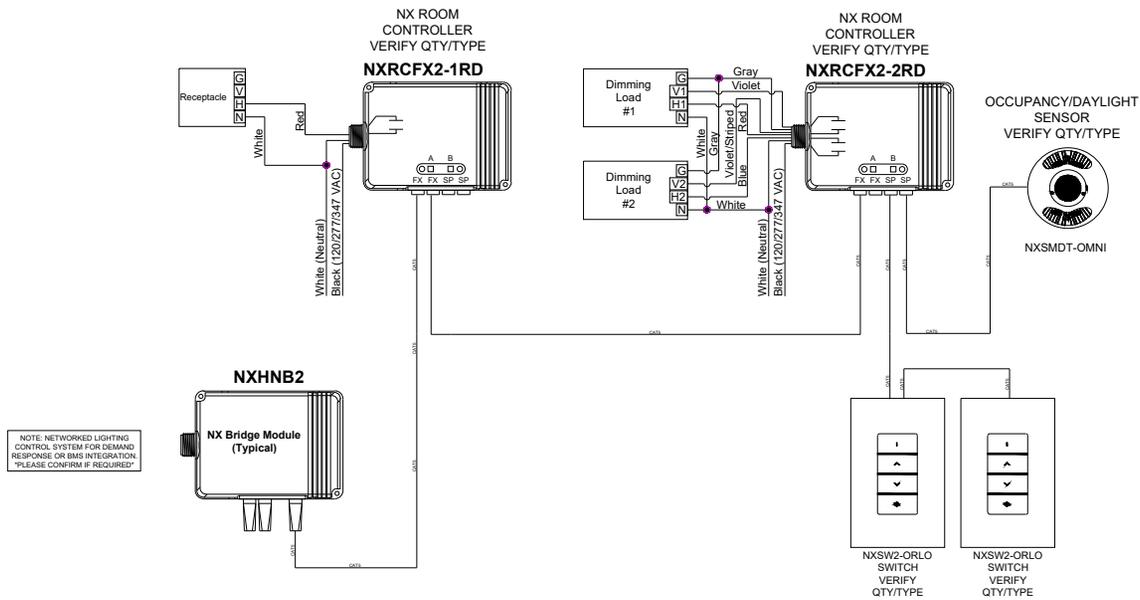


SEQUENCE OF OPERATION

1. Lighting (a) auto On to 50% and controlled receptacles auto On when occupancy detected.
2. Manual On/Off/Dim general lighting (a) with dimmer switch.
3. Manual On/Off/Dim control under cabinet lighting (b) with dimmer switch.
4. Auto off all lighting and controlled receptacles within 20 minutes of occupants leaving except for refrigerators and water dispensers, **Exception 1 (a)**

Note: Diagram is typical for space type. Provide proper quantity and type of occupancy sensors, switches, room controllers, daylighting sensors, etc., per code requirement for each space.



NOTE: NETWORKED LIGHTING CONTROL SYSTEM FOR DEMAND RESPONSE OR BMS INTEGRATION. *PLEASE CONFIRM IF REQUIRED*

	REV:	QUOTE ID:	DATE:	BY:	TITLE 24 PART 6 2022 Breakroom
Controls Dept. Phone: 214-477-2245 Email: Lightingcontrols@plp.com					PROJECT:
	Main Switchboard: (864) 678-1100 Technical Service: (800) 888-8006 www.currentlighting.com				DESIGNED BY: ISSUE DATE: DRAWING - CURRENT REVISION:

© 2022 Current Lighting Solutions, LLC. All rights reserved.
 Information and specifications subject to change without notice.
 All values and design or typical values unless measured under laboratory conditions.