
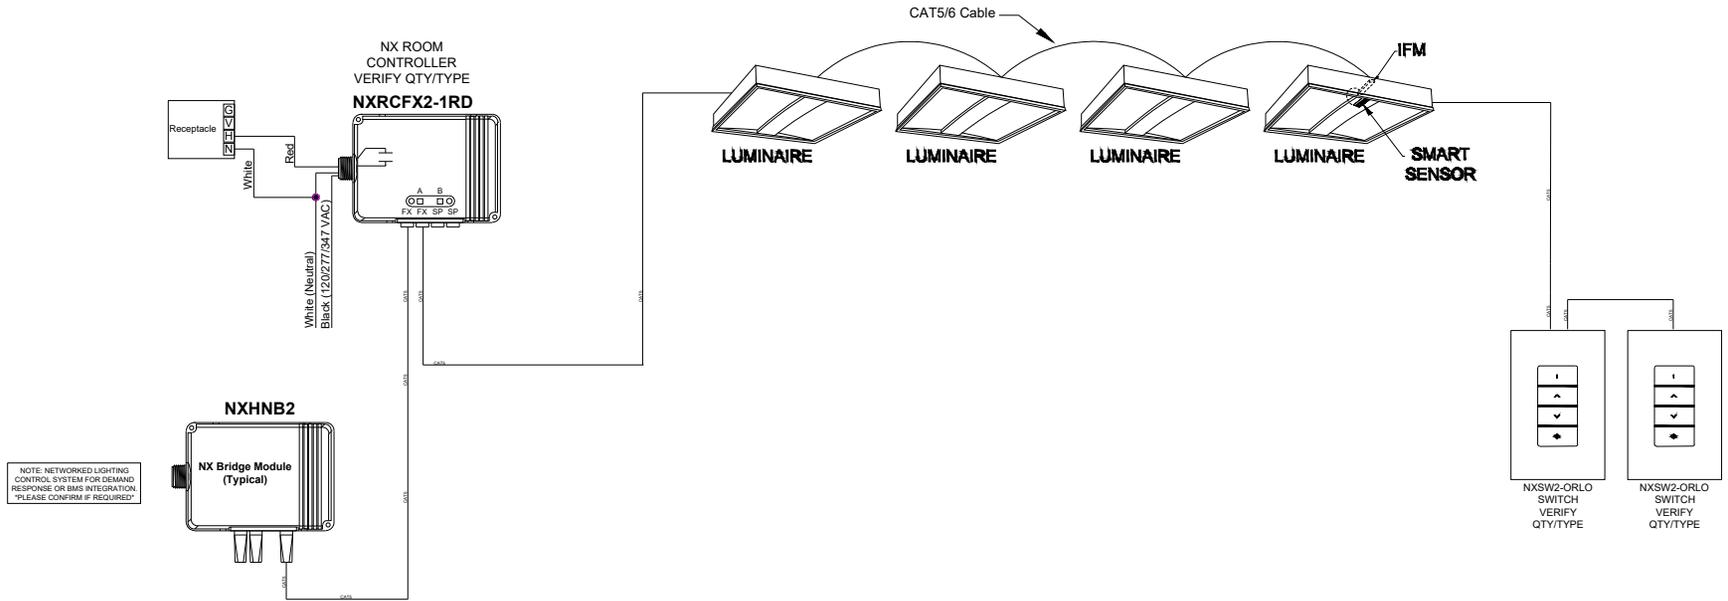


## SEQUENCE OF OPERATION

1. Each 600 sq ft lighting zone and receptacles on 100% when occupancy is detected.
2. Manual On/Off/Dim general lighting (a,b,c,d,e) with dimmer switches.
3. Lighting in primary (a) and secondary (b) daylight zones will continuously dim based on daylight contribution to maintain a consistent FC at task level.
4. Lighting auto 50% off within 20 minutes of occupants leaving each zone
5. All lighting and receptacles 100% off at end of business day via time clock.

Note: Diagram is typical for space type. Provide proper quantity and type of occupancy sensors, switches, room controllers, daylighting sensors, etc., per code requirement for each space.

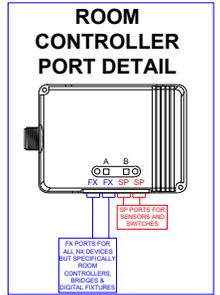

<b>PLP</b> SoCal  <small>Contra Dept. Phone: 913-877-2465 Email: Lightingsolutions@plpsocal.com</small>	REV:	QUOTE ID:	DATE:	BY:	Project Name:
					<b>TITLE 24 PART 6 2022 Open Office</b>
					<small>Main Switchboard: (854) 878-1000 Technical Service: (800) 888-8006 www.currentlighting.com</small>
					<small>©2022 Current Lighting Solutions, LLC. All rights reserved. Information and specifications subject to change without notice. All values are design or typical values unless indicated under laboratory conditions.</small>
					<small>DESIGNED BY: [ ] ISSUE DATE: [ ] DRAWING: CURRENT REVISION: [ ]</small>